


# V: 2022.01 A7602E SIMCom LTE Cat 1 Module

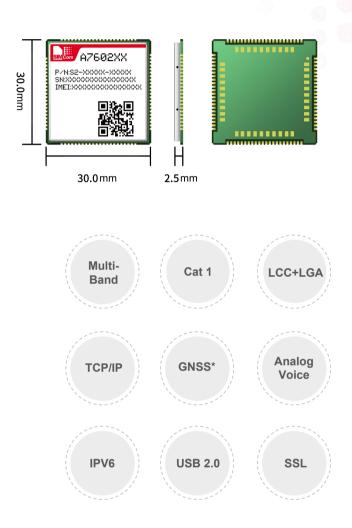

## **Key Benefits**

### **Product Description**

A7602E is the LTE Cat 1 module which supports wireless communication modes of LTE-FDD/GSM/ GPRS/EDGE. It supports maximum 10Mbps downlink rate and 5Mbps uplink rate.

A7602E adopts LCC+LGA form factor and is compatible with SIM5320/SIM5360 series(UMTS/HSPA+ modules), and SIM7600/SIM7600-H series(LTE modules), which enables smooth migration from 3G products to LTE products, and greatly facilitates more compatible product design for the customer needs.

A7602E supports multiple satellite high accuracy positioning GNSS systems (optional), multiple built-in network protocols, supports drivers for main operation systems (USB driver for Windows, Linux and Android etc.) and software function. Meanwhile A7602E integrates main industrial standard interfaces, with powerful expansibility, including abundant interfaces such as UART, USB, I2C, GPIO, which is suitable for main IOT applications such as telematics, surveillance devices, POS, industrial routers, and remote diagnostics etc.

- LCC+LGA form factor with abundant interfaces
- Suitable for LTE and GSM networks
- Abundant software functions: LBS#, SSL,FOTA
- Support GNSS\* function

Copyright © 2020 SIMCom Wireless Solutions Limited All Rights Reserved Building B, SIM Technology Building, No.633, Jinzhong Road Changning District, Shanghai P.R.China Tel: 86-21-31575100 Email: support@simcom.com Web: www.simcom.com



#### **General Features**

Frequency Bands	LTE-FDD B1/B3/B5/B7/B8/B20
	GSM/GPRS/EDGE 900/1800 MHz
Supply Voltage	3.4V ~ 4.2V, Typ: 3.8V
Control Via AT C	Commands
Operation temperature	-40°C ~ +85°C
Dimensions	30.0*30.0*2.5mm
Weight	TBD

#### **Other Features**

USB Driver for Microsoft Windows 7/8/10		
USB Driver for Linux /Android		
RIL supporting for Android 5.0/6.0/7.0/8.0/9.0		
Firmware update via USB/FOTA		
TCP/IP/IPV4/IPV6/Multi-PDP/FTP/FTPS/HTTP/HTTPS/DNS		
RNDIS/PPP/ECM		
SMS		
SSL, FOTA#		
TTS#, LBS#		

#### **Data Transfer**

LTE Cat 1	Uplink up to 5Mbps
	Downlink up to10Mbps
EDGE	Uplink/Downlink up to 236.8Kbps
GPRS	Uplink/Downlink up to 85.6Kbps

#### Interfaces

USB2.0	
UART	
(U)SIM card(1.8V/3V)	
Analog Voice	
ADC	
I2C	
GPIO	
Antenna: Primary	

Antenna: Primary GNSS\*

#### Certifications

CE-RED#/RoHS#/REACH#

Note

\*: optional

#: means under developing/on-going/planning

Copyright © 2020 SIMCom Wireless Solutions Limited All Rights Reserved Building B, SIM Technology Building, No.633, Jinzhong Road Changning District, Shanghai P.R.China Tel: 86-21-31575100 Email: support@simcom.com Web: www.simcom.com